

Key #	Description	QTY	Part#
1	Ratchet Wheel	2	M4900-1
2	Handle Pawl	1	M4900-2
3	Spring	3	M4900-3
4	Tension Handle	1	M4900-4
5	Knob	2	M4900-5
6	E-Ring	1	M4900-6
7	External Retaining Ring	1	M4900-7
8	Pin	1	M4900-8
10	Washer	1	M4900-10
11	Adjustment Plate	1	M4900-11
12	Dowel Pin	2	M4900-12
14	Screw	3	M4900-14
15	Screw	6	M4900-15
16	Die Holder Axle	1	M4900-16
17	Strap Lifter	1	M4900-17
18	Die Holder	1	M4900-18
19	Die	3	M4900-19
20	Dowel Pin	3	M4900-20
KIT (21)	Frame	1	M4900-KIT
22	Clutch Plug	1	M4900-22
23	Rear Strap Guide	1	M4900-23
25	Large Bearing	1	M4900-25
26	Support Spring	1	M4900-26
27	Shaft	1	M4900-27
28	Pawl Shaft	1	M4900-28
30	Set Screw	2	M4900-30
31	Nut	1	M4900-31
32	Adj. Screw	1	M4900-32
33	Small Bearing	1	M4900-33
34	Washer	1	M4900-34
35	Retaining Ring	1	M4900-35
36	Long Pawl	1	M4900-36
37	Short Pawl	1	M4900-37
38	Feed Wheel	1	M4900-38
39	Screw	4	M4900-39

Key #	Description	QTY	Part#
40	Screw	2	M4900-40
41	Cutter Blade	1	M4900-41
42	Cam Follower	1	M4900-42
43	Bushing	2	M4900-43
44	Die Holder Bearing	2	M4900-44
47	Front Strap Guide	1	M4900-47
KIT (48)	Side Cover	1	M4900-KIT
49	Pin	1	M4900-49
50	Strap Guide Pawl	1	M4900-50
51	Pin	1	M4900-51
52	Cover	1	M4900-52
53	Screw	2	M4900-53
54	Guide Arm	1	M4900-54
55	Support Shaft	1	M4900-55
58	Bushing	1	M4900-58
59	Nut	1	M4900-59
61	Washer	2	M4900-61
65	Eccentric Shaft	1	M4900-65
66	Tension Handle	1	M4900-66
67	Gripper Adj. Screw	1	M4900-67
68	Support Handle	1	M4900-68

XX Strap Guide kits:**M4900-SG-12 (flip guides for 5/8" strap)****M4900-SG-34 (flip guides for 5/8" strap)****Shipments FOB our plant**

MIP-4900 ADJUSTMENT INSTRUCTIONS

1. ADJUSTING THE MIP-4900 FOR STRAP WIDTH


The MIP-4900 can be adjusted for strapping with widths of 1/2", 5/8" or 3/4". The tool is equipped with one of two sets of reversible strap guides. With part number **M4900-SG-12** the tool can be set for use with either 1/2" or 5/8" strapping. With part number **M4900-SG-34** the tool can be set for use with 5/8" or 3/4" strapping. Guide sets are stamped "13" for 1/2", "16" for 5/8" and "19" for 3/4". To change strap width, the three strap guides must be reversed, as follows:

- a) Remove Screws **39** from the front and rear of the tool. Turn Front and Rear Guides around and replace the screws. Make sure that the same stamped numbers are exposed on each Guide: "13" for 1/2" strap, "16" for 5/8" strap, and "19" for 3/4" strap.
- b) Unscrew **53** and remove Cover **52** and the Strap Guide. Remove Pin **51** and insert it into the same hole on the opposite side of the Strap Guide. Reverse the Strap Guide and replace it in the tool so that the free end of Pin **51** enters the hole in the Arm **54**. Put the guide on the Pin **49**. Replace Cover **52** and tighten the Screw **53**. The exposed stamped number on the Strap Guide should match the numbers on the Front and Rear Guides.

NOTE: Check the proper execution of Step 1b) by squeezing together the feedwheel support handle **68** and the sealer handle **66**. The strap guide should pivot upward along with the feed wheel assembly.

2. ADJUSTING THE MIP-4900 FOR STRAP THICKNESS

The MIP-4900 can be used with regular duty strapping from .015" to .027" thick; and high tensile strapping up to .025" thick. The tool can be easily adjusted for strap thickness by loosening Screw **53** and rotating the Adjustment Plate **11** on the side of the tool. Rotating the Adjustment Plate **11** will change the depth of the cutter. The Adjustment Plate **11** serves as a wrench to turn a hex-end shaft running through the tool. The opposite end of the shaft is round and has a line scribed on it, as shown below. When the line points straight up, the cutter is at its shallowest position; when the line points straight down the cutter is deepest. The usual setting is about half way between these extremes.

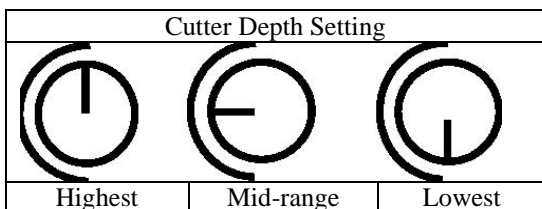

If the Adjustment Plate **11** is at the end of its travel, remove Screw **53** and reposition Adjustment Plate **11** so that it is

within the desired adjustment range. Replace Screw **53** and repeat the above steps until the desired cutting depth is reached.

NOTE: The tool is set up properly if, after interlocking the strap, the upper strap is cut off cleanly and there is a slight mark on the lower strap.

3 ADJUSTING THE FEEDWHEEL CLEARANCE

To adjust the clearance between the Feedwheel **38** and Clutch Plug **22**, it is easy done, as follows:

- a) Loosen Nut **59** to the right of the rear strap guide. This frees the Gripper Adjustment Screw **67**.
- b) Turn the tool up on its nose, with the bottom of the tool facing you, and squeeze the Feedwheel Support Handle **68**. This will lift the Feedwheel Support Handle **68** off the Gripper Adjustment Screw **67**.
- c) Turn the Gripper Adjustment Screw **67** clockwise to decrease and counterclockwise to increase the gap between the Feedwheel **38** and the Clutch Plug **22**.
- d) When the gap is properly adjusted, re-tighten the lock Nut **59** to keep the adjusting screw from moving while the tool is being operated.

NOTE: The gap is set properly when a single piece of strapping is gripped tightly between the Feedwheel and the Bottom Gripper, but a piece of paper slides easily between the Feed Wheel **38** and Gripper **22**.